



Cod.1098/407P

10 CH, S+265 NVR, 8M, 8 PoE ports, 2HDD slot

TECHNICAL FEATURES


- **HD Input**
- Plug and play
- S+265/H.265/H.264 video formats
- Connectable to the third-party network cameras
- Up to 10-channel input
- 8 PoE ports
- Supports live view, storage, and playback of the connected camera at up to 8MP resolution
- **HD Output**
- 1xHDMI and 1xVGA simultaneous outputs
- HDMI Video output at up to 4K (3840 × 2160) resolution
- **HD Storage**
- • 2 SATA interfaces, up to 10TB for each HDD
- • S+265 compression
- **HD Transmission**
- 1xRJ45 self-adaptive 10/100/1000 Mbps network interface
- PoE Port: 8xRJ45 self-adaptive 10/100 Mbps network interfaces
- **Various Applications**
- VCA detection alarm is supported
- Smart search for the selected area in the video and smart playback to improve the playback efficiency
- Web6 supports plug-in-free browsing and can preview videos on all browsers
- Support 250m long-distance transmission




| Input | |
|---------------------------|--|
| Video Input | 10-ch |
| Max Resolution | 8MP |
| Two-way Audio Input | 1-ch, 3.5mm |
| Bandwidth | Income 120Mbps; Outgoing 100Mbps |
| Output | |
| HDMI/VGA Output | HDMI 1-ch, 3840×2160, 2560×1600, 2560×1440, 1920×1080, 1280×720, 800×600, 1024×768, 1366×768, 1440×900, 1280×800 VGA 1-ch, 1920×1080, 1280×720, 800×600, 1024×768, 1366×768, 1440×900, 1280×800 |
| Screen Split | 1/3/4/6/8/9/10 |
| Audio Output | 1 RCA |
| Decoding | |
| Decoding Format | S+265/H.265/H.264 |
| Recording Resolution | 8MP/6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF |
| Preview Capability | 1 8MP, 1 6MP, 1 5MP, 2 4MP, 2 3MP, 4 1080P, 8 720P, 10 4CIF |
| Synchronous Playback | 1 8MP, 1 6MP, 1 5MP, 2 4MP, 2 3MP, 4 1080P, 8 720P |
| Records Encryption | Yes |
| Hard Disk | |
| SATA | 2 SATA interfaces for 2 HDDs |
| Capacity | Up to 10TB for each HDD |
| eSATA Interface | N/A |
| Array Type | N/A |
| External Interface | |
| Network Interface | 1 RJ45 self-adaptive 10/100/1000 Mbps network interface |
| USB Interface | 2 USB 2.0 |
| Serial Interface | N/A |
| Alarm In/Out | 4/1 |
| Network | |
| Protocol | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, QoS, IPV4, IPV6, Multicast, ARP, UDP, SNMP, SSL, Telnet, RTMP, NFS |
| System Compatibility | ONVIF (PROFILE S/T/G), SDK, P2P |
| POE | |
| POE Interface | 8 RJ45 self-adaptive 10/100 Mbps network interface |
| Power per POE Port | 30W |
| Max Current per POE Port | 600mA |
| General | |
| Web Version | Web6 |
| Language | Simple Chinese, Traditional Chinese, English, Spanish, Korean, Italian, Turkish, Russian, Thai, French, Polish, Dutch, Hebraism, Arabic |
| Operating Conditions | -10 ~ 55 , 10%~90% RH |
| Power Supply | 100~240V AC, 50~60 Hz |
| Consumption (without HDD) | 25W (without HDD) |
| Chassis | 1U |
| Dimensions | 47.5×277×440mm, |
| Weight (without HDD) | 2.9Kg |

1098/407P 10 CH, S+265 NVR, 8M, 8 PoE ports, 2HDD slot

DIMENSIONS (mm)

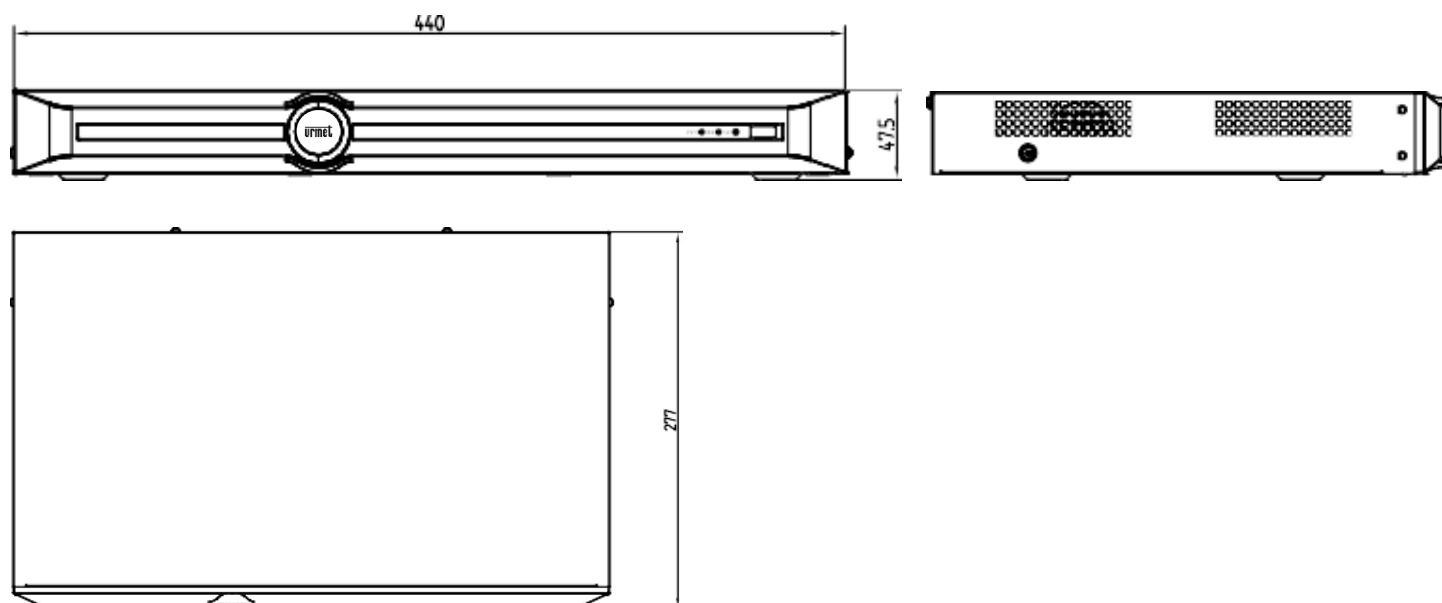

Physical Interfaces

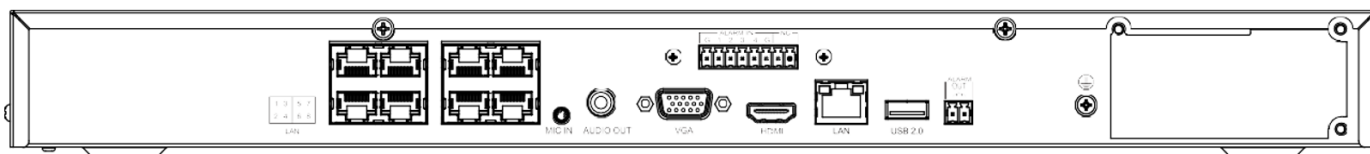

Technical specifications are subject to changes without notice.

Urmet S.p.A. | Via Bologna, 188/C | 10154 TORINO (ITALY)

T +39 011.24.00.000

info@urmet.com | urmet.com

CUSTOMER SERVICE +39 011.23.39.810